

## SMART HART Nak FILLED MELT PRESSURE TRANSMITTERS **HKE SERIES - CURRENT OUTPUT**

AND PERFORMANCE LEVEL 'c'

4...20mA Output



The HKE series of Gefran are pressure transmitters with HART communication protocol for using in high temperature environment.

The main characteristic of this series is the capability to read temperature of the media up to 538°C.

The constructive principle is based on the hydraulic trasmission of the pressure.

The fluid-filled system assures the temperature stability. The physical measure is transformed in a electrical measure by means of strain-gauge technology.

#### **MAIN FEATURES**

- Pressure ranges from: 0-35 to 0-1000 bar / 0-500 to 0-15000 psi
- Accuracy: < ±0.25% FSO (H); < ±0.5% FSO (M)
- · Hydraulic transmission system for pressure signal guarantees stability at working temperature (NaK).
- · Liquid conforming to RoHS Directive. NaK is defined as a safe substance (GRAS)
- · Quantity of NaK contained per model: HKE0 series (30mm<sup>3</sup>) [0.00183 in<sup>3</sup>], HKE1, HKE2, HKE3 (40mm<sup>3</sup>) [0.00244 in<sup>3</sup>]
- 1/2-20UNF, M18x1.5 standard threads; other types available on request
- · Autozero function on board / external option
- Inconel 718 diaphragm with GTP+ coating for temperatures up to 538°C (1000°F)
- 15-5 PH diaphragm with GTP+ coating for temperatures up to 400°C (750°F)
- · Hastelloy C276 diaphragm for temperatures up to 300°C
- · 17-7 PH corrugated diaphragm with GTP+ coating for ranges below 100bar-1500psi (up to 400°C/750°F)
- · Stem material: 17-4 PH

GTP+ (advanced protection) Coating with high resistance against corrosion, abrasion and high temperature

#### **AUTOZERO FUNCTION**

All signal variations in absence of pressure can be eliminated by using the Autozero function.

This function is activated by closing a magnetic contact located on the transmitter housing.

The procedure is permitted only with pressure at zero.


This function can be activited via HART as well.

#### **TECHNICAL SPECIFICATIONS**

Accuracy (1)	<b>H</b> <±0.25%FSO (1001000 bar) <b>M</b> <±0.5%FSO (171000 bar)	
Resolution	16 bit	
Measurement range	017 to 01000bar 0250 to 015000psi	
Rangeability	3:1	
Maximum overpressure (without degrading performances)	2 x FS 1.5 x FS above 700bar/10000psi	
Measurement principle	Extensimetric	
Power supply	1330Vdc	
Maximum current absorption	23mA (40mA with relay optional)	
Output signal Full Scale (FSO)	20mA	
Zero balance (tollerance ± 0.25% FSO)	4mA	
Calibration signal	80% FSO	
Power supply polarity reverse protection	YES	
Compensated temperature range housing	0+85°C	
Operating temperature range housing	-30+85°C	
Storage temperature range housing	-40+125°C	
Thermal drift in compensated range: Zero / Calibration / Sensibility	< 0.02% FSO/°C	
Diaphragm maximum temperature	538°C / 1000°F	
Zero drift due to change in process temperature (zero)	< 3.5 bar/100°C / < 28 psi/100°F	
Thermocouple (model HKE2)	STD: type "J" (isolated junction)	
Protection degree (with 6-pole female connector)	IP65	


FSO = Full scale output:
(1) BFSL method (Best Fit Straight Line): includes combined effects of Non-Linearity, Hysteresis and Repeatability

#### **MECHANICAL DIMENSIONS**

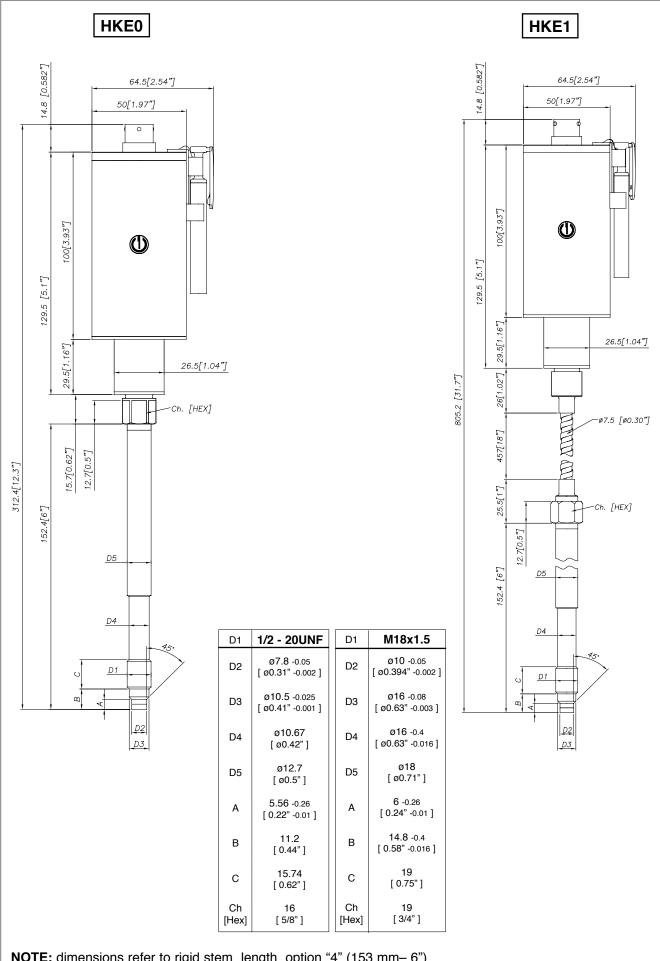

NOTE: dimensions refer to rigid stem length option "4" (153 mm-6")

WARNING: For installation use a maximum tightening torque of 56 Nm (500 in-lb)

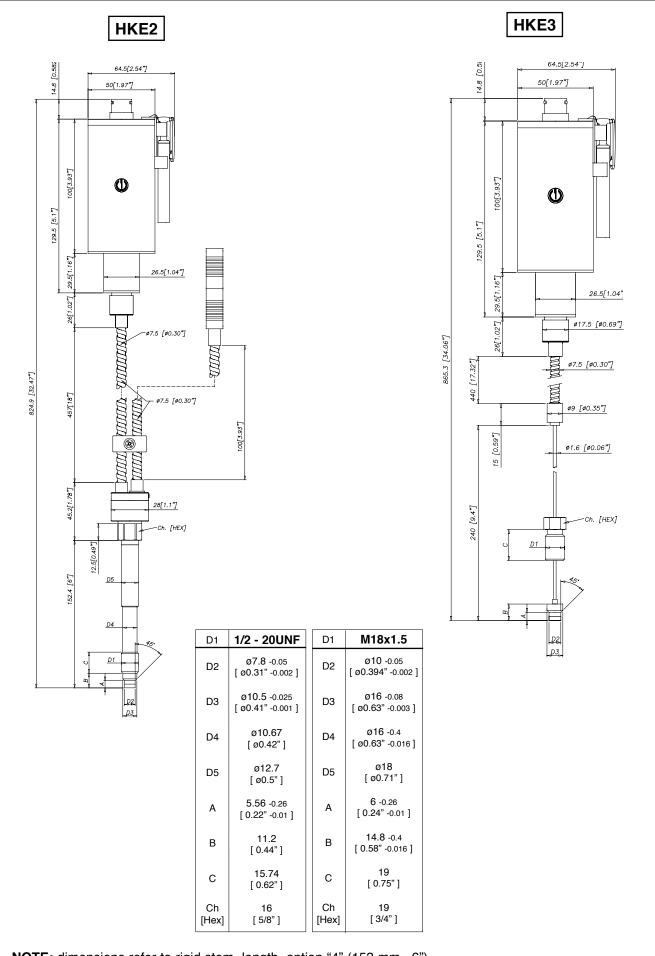

NOTE: dimensions refer to rigid stem length option "4" (153 mm-6")

WARNING: For installation use a maximum tightening torque of 56 Nm (500 in-lb)

#### SELF DIAGNOSTICS (ONLY FOR PL'C' VERSIONS)

Below the conditions detected by the sensor self-diagnostics:

- · Cut cable / device non connected / broken power supply, output ≤ 3.6mA
- · Pin detachment output ≤ 3.6mA
- · Broken primary element ≥21mA
- · Pressure above 200% of the span, output ≥21mA
- · Voltage monitor in case of overvoltage/undervoltage/voltage variation in the electronics, output ≤ 3.6mA (\*)
- · Program sequence error, output ≤ 3.6mA (\*)
- · Overtemperature on the electronics, output ≤ 3.6mA (\*)
- · Error on the primary element output or on the first amplification stage, output ≥ 21mA

(\*) In such conditions the Alarm Type can be programmed via HART at ≥ 21 mA.

#### OPTIONAL RELAY OUTPUT FOR EXCESS PRESSURE PROTECTION

Safety relay characteristics:

- Activation threshold to be defined in the order code

Rated carry current: 1ARated voltage: 24Vdc ± 20%

· Switch accuracy: 2 x sensor accuracy

· Hysteresis: 2% FSO

SUPPLY	OUTPUT	RELAY STATUS
OFF	-	OPEN
ON	< X%fs	CLOSED
ON	> X%fs	OPEN
ON	Output ≤ 3.6mA	OPEN
ON	Output ≥ 21mA	OPEN

### NAMUR COMPLIANCE (ONLY FOR PL'C' VERSIONS)

The sensors are tested according to Namur NE21 recommendations. The same compatibility is valid for the NE43 Namur recommendation with the following sensor behaviour in case of breakdown:

- · Cut cable: breakdown information as the signal is ≤ 3.6mA
- · Device not connected: breakdown information as the signal is ≤ 3.6mA
- Broken power-supply: breakdown information as the signal is ≤ 3.6mA or in case of performance problems:
- · Broken primary element ≥ 21mA
- · Pressure above 200% of the span, output ≥21 mA
- · Others  $\leq$  3.6mA(\*)


(\*) In such a condition the Alarm Type can be programmed via HART at  $\geq$  21 mA.

Note: in all the remaining situations, the output signal is always included between 3.8 and 20.5mA.



**Recommendation**: the error level set by the customer (e.g. maximum pressure value) has to be inside the nominal range.


#### **LOAD DIAGRAM**

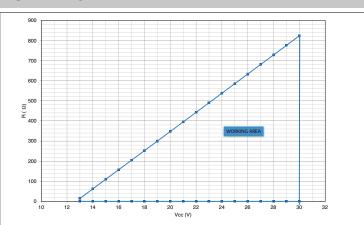

The diagram shows the optimum ratio between load and power supply for transmitters with 4...20mA output.

For correct function, use a combination of load resistance and voltage that falls within the two lines in the graph above.

#### **AUTOZERO FUNCTION**

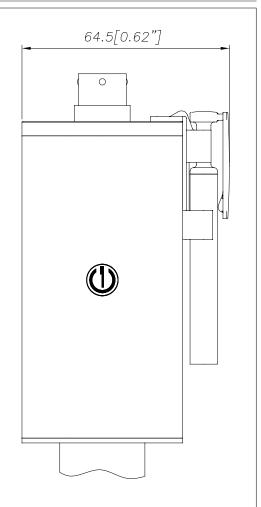


The Autozero function is activated through a magnetic contact (external magnet supplied with the sensor).


The Autozero function can be activated through HART command as well.

See the manual for a complete Autozero function explanation.

#### **ELECTRICAL CONNECTIONS**


#### **CURRENT OUTPUT**

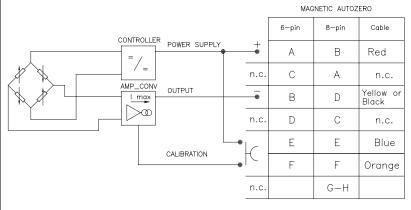




The cable shield is tied to both sides, i.e. to the sensor connector and to the controller


#### **RELAY OUTPUT**

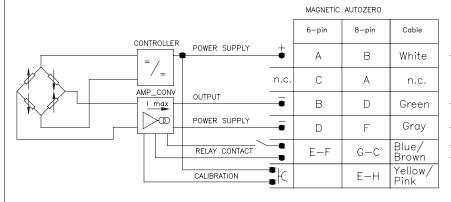




The cable shield is tied to both sides, i.e. to the sensor connector and to the controller


# 6 pin Connector VPT07RA10-6PT2 (PT02A-10-6P)



## 8 pin Connector (PC02E-12-8P) Bendix




### CABLE OUTPUT (1/2 14-NPT) L = 1 m

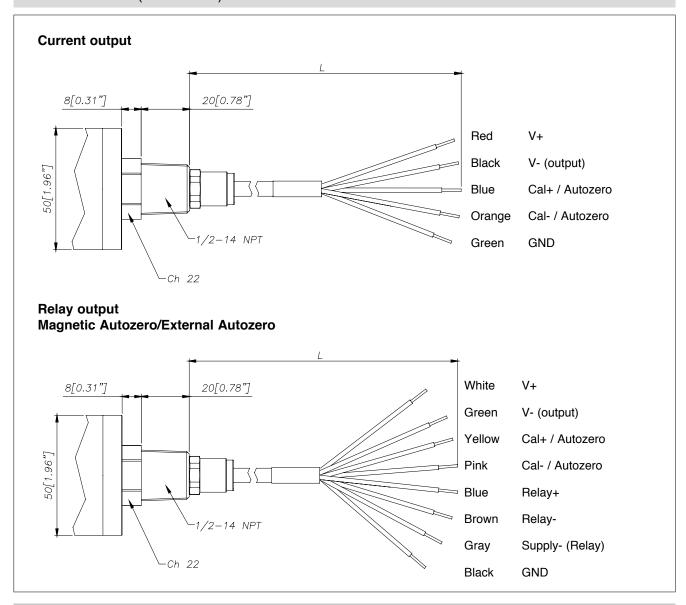

#### **ACCESSORIES**

6-pin female connector (IP65 protection degree)	CON300	Cable color code	
8-pin female connector	CON307	Conn.	Wire
Extension cables		A-2	Red
6-pin connector with 8m (25ft) cable	C08WLS	B-4	Black
6-pin connector with 15m (50ft) cable	C15WLS	C-1	White
6-pin connector with 25m (75ft) cable	C25WLS	D-6	Green
6-pin connector with 30m (100ft) cable	C30WLS	E-7	Blue
Accessories		F-3	Orange
Mounting bracket	SF18	5	Grey
Dummy plug for 1/2-20 UNF	SC12	8	Pink
Dummy plug for M18x1,5	SC18		1
Drill kit for 1/2 -20 UNF	KF12		
Drill kit for M18 x 1,5	KF18		
Cleaning kit for 1/2-20 UNF	CT12		
Cleaning kit for M18x1,5	CT18		
Fixing pen clip	PKIT 1032		
Autozero pen	PKIT 378		
Thermocouple for HKE2 model Type "J" (153mm - 6" rigid rod)	TTER 601		

#### ORDER CODE

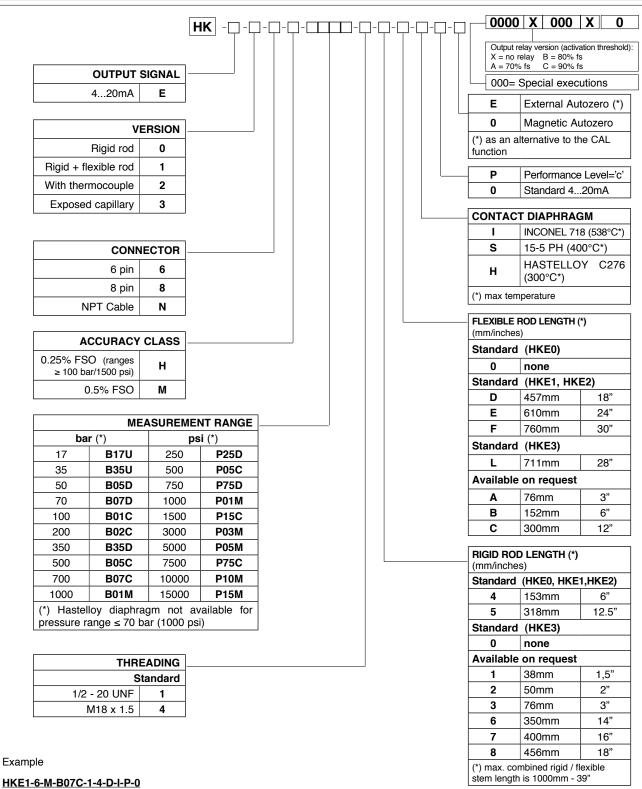

Melt pressure transducer 4...20mA output with HART protocol, 6-pin connector, 0.5% accuracy, 700 bar pressure range, 1/2-20 UNF threading, 153 mm (6") rigid rod, 457 mm (18") flexible rod, Inconel 718 diaphragm, Performance Level='c'.

Sensors are manufactured in compliance with:

- EMC compatibility directive
- RoHS directive
- machinery directive

Electrical installation requirements and conformity certificate are available on our web site: www.gefran.com

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice.

#### **GEFRAN** spa

via Sebina, 74 25050 PROVAGLIO D'ISEO (BS) - ITALIA tel. 0309888.1 - fax. 0309839063 Internet: http://www.gefran.com

